

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2000/01/25
(87) Date publication PCT/PCT Publication Date: 2000/07/27
(85) Entrée phase nationale/National Entry: 2001/06/13
(86) N° demande PCT/PCT Application No.: EP 00/00536
(87) N° publication PCT/PCT Publication No.: WO 00/43644
(30) Priorité/Priority: 1999/01/25 (199 02 817.6) DE

(51) Cl.Int.⁷/Int.Cl.⁷ F01M 11/00, F16J 15/14


(71) Demandeur/Applicant:
LOCTITE DEUTSCHLAND GMBH, DE

(72) Inventeurs/Inventors:
SCHMATZ, THOMAS MARTIN, DE;
RITTER, KARL-HEINZ, DE

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : PROCEDE POUR MONTER LA CUVETTE A HUILE SUR UN BLOC MOTEUR D'UN MOTEUR A COMBUSTION INTERNE, MOTEUR A COMBUSTION INTERNE SUR LEQUEL LA CUVETTE A HUILE EST FIXEE AU BLOC MOTEUR SELON CE PROCEDE, ET ASSEMBLAGES PAR BRIDES REALISES SELON LEDIT PROCEDE

(54) Title: METHOD FOR MOUNTING THE OIL PAN ON AN ENGINE BLOCK OF AN INTERNAL COMBUSTION ENGINE, INTERNAL COMBUSTION ENGINE IN WHICH THE OIL PAN IS FASTENED TO THE ENGINE BLOCK ACCORDING TO SAID METHOD, AND FLANGE CONNECTIONS PRODUCED ACCORDING TO THE INVENTIVE METHOD

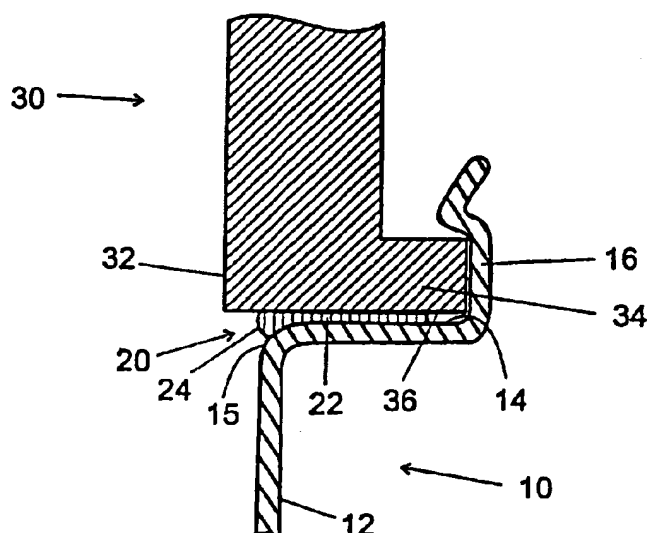

(57) Abrégé/Abstract:

In order to mount the oil pan (10) on the engine block (30) of an internal combustion engine, a sealing element is produced between the engine block (30) and the oil pan (10) using a hardenable composition (20). When in a hardened state, the adhesion of the composition (20) is sufficiently large enough to hold the oil pan (10) to the engine block (30). The adhesion should equal at least 0.5 N/mm^2 , in particular, greater than 0.8 N/mm^2 . The hardenable composition (20) can be comprised of a silicon material. The oil pan (10) can be fixed to the engine block (30) at least during the hardening of the composition (20). To this end, the edge of the oil pan is constructively designed such that an independent fixation results when joining the oil pan (10) to the engine block (30).



Process for attaching the oil sump to an engine block of a combustion engine, combustion engine with which the oil sump is attached to the engine block in accordance with that process, and flange connections which are made in accordance with that process

ABSTRACT

For attaching the oil sump (10) to the engine block (30) of a combustion engine, a seal is made between the engine block (30) and the oil sump (10) by means of a curable composition (20). The adhesion of the composition (20) when cured is sufficient to secure the oil sump (10) to the engine block (30). The adhesion should be at least 0.5 N/mm^2 , especially 116 psi more than 0.8 N/mm^2 . The curable composition (20) can be a silicone composition. The oil sump (10) can be fixed to the engine block (30) at least during the curing of the composition (20). To this end, the edge of the oil sump can be designed such that a self-fixing takes place when the oil sump (10) is joined to the engine block (30). 72.5 psi

(Fig. 1).

19-01-2001

EP 000000536

PCT/EP00/00536
Loctite Deutschland GmbH

January 19, 2001
32814-PCT

Process for attaching the oil sump to an engine block of a
combustion engine, combustion engine with which the oil sump
is attached to the engine block in accordance with that
process, and flange connections which are made in accordance
with that process

Description

The invention relates to a process for attaching the oil sump
to an engine block of a combustion engine, a seal being made
between a first sealing surface on the oil sump and a second
sealing surface on the engine block, for which the curable
5 composition is applied to one or to both sealing surfaces.
The invention further relates to a combustion engine with an
engine block and an oil sump attached thereto, a first sealing
surface being present on the oil sump and a second sealing
surface on the engine block and between which is a curable
10 composition, and in general flange connections with two flange
elements between which a seal is made with a curable
composition.

Such a process and such a combustion engine and, resp., flange
15 connection are known from PATENT ABSTRACTS OF JAPAN, Vol. 007,
No. 275 (M-261) (= JP 58152151 A), the actual attachment of
the oil sump here being in conventional manner by means of
threaded bolts.

20 A combustion engine is known from DE-A-41 03 685 with which
the oil sump is connected to the engine block by means of a
bonding agent having permanent elasticity when cured. An
adapter is provided as a stable preform between the engine
block and the oil sump and the adapter has a vertical stay
25 supporting the bonding agent to the inside of the engine.
The structure of oil sump, bonding agent and preform is after

MODIFIED PAGE

19-01-2001

EP 000000536

2

curing the bonding agent attached to the engine block in conventional manner by screws and seals.

5

There is known from EP-A-0 284 027 an anaerobically vulcanized sealing composition, as well as its use on parts of hydraulically controlled mechanisms and combustion engines, such as the connection between a flange part to an oil sump and an engine block, a connection between cylinder head and cylinder head cover and a connection at the gear box. As in particular the mention as seal of the connection between cylinder head and cylinder head cover shows, screws are hear additionally used as fastening elements.

15

A method of making polysiloxane sealings is known from EP-A-0 409 079, making a seal to the flange of a motor vehicle oil sump being quoted as an application example. Openings for the fastening bolts are provided for in the flange of the oil sump in the respective drawing so that the fastening bolts are here, too, apparently used as connecting elements.

20

In a process known from DE-U-298 12 978, the oil sump is also secured to the engine block in the conventional manner by screws. To this end, the engine block must be provided with a number of threaded holes and a corresponding number of screws must then be screwed in.

25

The object of the invention is to save on these processes and components.

30

This object is achieved in accordance with the invention by the adhesion of the curable composition when cured being sufficient to secure the oil sump to the engine block and by threaded bolts not being used as fastening elements. There is in addition with the process according to the invention that

35

19-01-2001

EP 000000536

2a

the oil sump is fixed to the engine block at least during the curing of the composition.

- 5 It has shown that the adhesion of curable compositions or adhesives is sufficient to secure an oil sump permanently and securely to an engine block. Preferably an adhesive with an adhesion of at least 0.5 N/mm^2 , especially of more than 0.8 N/mm^2 , is used.

10

- With the securing of the oil sump to the engine block in accordance with the invention, the threaded holes in the engine block are unnecessary and there is no screwing-in of the securing screws. The oil sump can easily be stamped from
15 steel sheet. A machining, e.g. a surface grinding or milling, of the sealing surfaces at the engine block and at the oil sump is not necessary as the curable composition can equalize unevennesses up to 0.5 mm or even 1 mm . The maximum allowable unevenness is limited by the fact that, with larger gaps
20 between the engine block and the oil sump, there is the danger that the curable composition will be blown out in the generally customary leak test by displacement with air (blow-out test) on the finally assembled engine. Some 30 minutes are needed to assemble the engine, and the composition
25 cannot cure sufficiently within this time span to resist the overpressure of about 0.5 bar applied in the leak test with thicker layer thicknesses especially if the curing time depends on the thickness of the layer as in the case of silicone adhesives which cure by humidity.

As there are no securing screws for the oil sump, there is a reduction in costs as a result of a decrease in the number of components, a reduction in the assembly time and a simplification of the manufacture of the engine block due to the absence of the threaded holes. Further, cost advantages result from the fact that the oil sump can be a stamped part.

The curable composition can be any adhesive which is suitable for the materials and which possesses a sufficient adhesion for the materials from which the engine block and the oil sump are made, that is metal, especially grey cast iron, aluminum-magnesium alloys and - for the oil sump - plastic. Obviously, the composition must be sufficiently resistant to the media used (oil, water/glycol, antifreeze). FIP (formed in place) products are particularly suited. A suitable curable composition is especially LOCTITE® RTV Silikon 5900 (RTV = room temperature vulcanization).

As such compositions have curing times of up to some days, it is generally necessary to attach the oil sump to the engine block during this time by a self-fixing connection. Clamps and snap connections are suitable for this. The edge of the oil sump can, for example, snap onto a flange of the engine block, or individual holding grips which are bent round the flange of the engine block can be provided at that edge. The edge of the oil sump can also be crimped or curled round the flange on the engine block. As these fixing means are only necessary until the curable composition has cured, they can be removed afterwards if need be and used again.

The sealing surfaces on the engine block and on the oil sump are preferably formed such that there is an uneven layer thickness over the width of the sealing surfaces. To this end, the edge of one or both of the sealing surfaces can have a chamfer with a angle of, e.g., 30° and a width of about 2 mm or be rounded off with a radius of about 4.5 mm, the gap formed being partially or completely filled with the curable

curable composition. The curable composition is applied in known manner. The volume of the gap is to be larger than the amount of curable composition applied so that none of the curable composition is pressed out at the edges. The maximum
5 size of the gap is to be chosen such that the wetting or adhesion of the freshly-applied composition is sufficient to retain the composition in the gap. The curable composition does not need to be applied or distributed over the whole width of the sealing surfaces. A gap free application in the
10 form of a bead is sufficient. With corresponding flange geometry, the application can, e.g., also be at the edge surface of the flange of the engine block, i.e. on a surface which lies parallel to the direction of the assembly comprised of the oil sump and engine block.

15 The process according to the invention is especially suitable for cases in which the oil sump need not contribute to the overall rigidity of the engine or other machine.

20 The advantages of the invention have a particularly clear effect when attaching an oil sump to the engine block. The invention can, however, on principle be used when making flange connections with which threaded bolts were hitherto used as connecting elements. The process according to the
25 invention is also suitable in the same manner, e.g., for the attachment of valve covers and of covers or lids to timing cases or gear boxes.

An embodiment example of the invention is explained in more
30 detail in the following with reference to the drawing. There are shown in:

Fig. 1 in section, the edge of the oil sump and of the oil
35 sump opening of the engine block with a first embodiment of the fixing means;

Figs. 2 to 4 in section, the edge of the oil sump with other

embodiments of the fixing means.

Fig. 1 shows an oil sump 10 which is fixed to an engine block 30 by means of a curable composition 20. The edge 12 of the oil sump 10 is bent to produce a substantially flat first sealing surface 14 (bend 15). The engine block 30 has an oil sump opening 32 surrounded by a flange which has a substantially flat second sealing surface 36. There is a layer 22 of the curable composition 20 between the two sealing surfaces 14, 36.

The bend 15 of the edge 12 of the oil sump 10 has a radius of about 4.5 mm so that the distance of the sealing surfaces 14, 36 from the inside of the oil sump 10 diminishes progressively. The thickness of the layer 22 of the curable composition 20 located between the sealing surfaces 14, 36 is, therefore, not uniform but is at its greatest on the inside of the oil sump 10 and decreases outwards.

Bent against the outer edge of the sealing surface 14 of the oil sump 10 is a fixing edge 16 which encompasses the flange 34 of the engine block 30 to the extent that the oil sump is fixed to the engine block 30 during the further assembly of the engine and the motor vehicle. The fixing edge 16 snaps or locks round the flange 34 when the oil sump 10 is pressed against the flange 34.

Later during the running of the motor vehicle, the fixing edge 16 simultaneously forms a safeguard against a detachment of the oil sump 10 from the engine block 30 in the event of an accident or other sudden stress impact.

Fig. 2 shows another possibility for fixing the oil sump 10 to the engine block 30. In a manner similar to that in Fig. 1, a fixing edge 16 is provided but barb-like tongues 18 which rest against the upper side of the flange 34 are pressed out from the fixing edge 16.

Fig. 3 shows a fixing of the oil sump 10 to the engine block 30 in which the fixing edge 16 of the oil sump 10 is reshaped after the application of the curable composition 20 and the joining of the oil sump 10 and the engine block 30 so that it encompasses the flange 34. This reshaping need not extend over the entire edge 16 of the oil sump 10. A pointwise fixing at a distance of, e.g., 20 cm is generally sufficient.

Fig. 4 shows an embodiment in which the edge 16 of the oil sump 10 forms an outwardly directed flange 38. After the application of the curable composition 20 and the joining of the oil sump 10 and the engine block 30, clamps 40 are attached which hold the oil sump 10 against the flange 34 of the engine block 30 during the curing of the composition 20.

15

Example:

To join together an oil sump 10 stamped from steel sheet and a cast steel engine block 30, the sealing surfaces 14, 36 are cleaned of loose dirt particles and dried. The sealing surfaces 14, 36 have a covering width of about 9 mm, and a bead about 3 mm in diameter of the curable composition 20 - which corresponds to about 10 g/m - is applied to one or both sealing surfaces 14, 36. LOCTITE® RTV-Silikon 5900 is used as curable composition 20. The oil sump 10 is then moved up onto the flange 34 of the engine block 30 so that the fixing edge 16 snaps around the flange 34. The bead of the curable composition 20 is pressed out to give a layer 22 about 0.5 mm thick and a part of the composition 20 is pressed inwards to the bend 15 of the edge 12 where the composition 20 forms a meniscus 24 between the oil sump 10 and the flange 34 of the engine block 30. Because of the high viscosity of the curable composition 20, the meniscus 24 is convex.

List of reference numerals

- 10 oil sump
- 12 edge
- 14 sealing surface
- 15 bend
- 16 fixing edge
- 18 tongues
- 20 composition
- 22 layer
- 24 meniscus
- 30 engine block
- 32 oil sump opening
- 34 flange
- 36 sealing surface
- 38 flange
- 40 clamp

19-01-2001

EP 000000536

PCT/EP00/00536
Loctite Deutschland GmbH

January 19, 2001
32814-PCT

Patent Claims

1. Process for attaching the oil sump (10) to an engine block (30) of a combustion engine, a seal being made by means of a curable composition (20) between a first sealing surface (14) on the oil sump (10) and a second sealing surface (36) on the engine block (30), for which the curable composition is applied to one or to both sealing surfaces, characterized
 - in that a curable composition (20) is used whose adhesion when cured is sufficient to secure the oil sump (10) to the engine block (30),
 - in that threaded bolts are not used as fastening elements and
 - in that the oil sump (10) is fixed to the engine block (30) at least during the curing of the composition (20).
2. Process according to claim 1, characterized in that a curable composition (20) with an adhesion of at least 0.5 N/mm^2 , especially of more than 0.8 N/mm^2 , is used.
3. Process according to claims 1 or 2, characterized in that the curable composition (20) is a silicone composition.
4. Process according to one of claims 1 to 3, characterized in that an oil sump (10) stamped from steel sheet or made from plastics material and a cast aluminum or grey cast iron engine block (30) are used.
5. Process according to one of claims 1 to 4, characterized in that the edge of the oil sump is designed such that a

self-fixing takes place when the oil sump (10) is joined to the engine block (30).

6. Process according to claim 5, characterized in that the oil sump (10) has a fixing edge (16) and the engine block (30) has a flange (34) and in that the fixing of the oil sump (10) takes place by the snapping of the fixing edge (16) onto the flange (34).
7. Process according to one of claims 1 to 4, characterized in that barb-like tongues (18) which rest against a flange (34) on the engine block (30) are formed at the edge (12) of the oil sump (10).
8. Process according to one of claims 1 to 4, characterized in that the edge of the oil sump is designed such that the oil sump (10) is fixable to the engine block (30) by a reshaping process taking place after joining.
9. Process according to one of claim 1 to 4, characterized in that after the oil sump (10) has been joined to the engine block (30), holding clamps (40) are attached in order to fix the oil sump (10) to the engine block (30).
10. Process according to one of the claims 1 to 9, characterized in that the sealing surfaces (14, 36) are shaped such that the sealing gap formed between them increases in size inwards.
11. Combustion engine having an engine block (30) and an oil sump (10) attached thereto, characterized
 - the oil sump (10) is attached to the engine block (30) with a curable composition (20) whose adhesion when cured is sufficient to secure the oil sump (10) to the engine block (30) and

- in that threaded bolts are not present as fastening elements.
- 12. Combustion engine according to claim 11, characterized in that the composition (20) when cured has an adhesion of at least 0.5 N/mm^2 , especially of more than 0.8 N/mm^2 .
- 13. Combustion engine according to claims 11 or 12, characterized in that the curable composition (20) is a silicone composition.
- 14. Combustion engine according to one of claims 11 to 13, characterized in that the oil sump (10) is stamped from sheet steel or made from plastics material and the engine block (30) consists of cast aluminum or grey cast iron.
- 15. Combustion engine according to one of claims 11 to 14, characterized in that the edge of the oil sump is designed such that a self-fixing takes place when the oil sump (10) is joined to the engine block (30).
- 16. Combustion engine according to claim 15, characterized in that the oil sump (10) has a fixing edge (16) and the engine block (30) has a flange (34) and in that the fixing of the oil sump (10) takes place by the snapping of the fixing edge (16) onto the flange (34).
- 17. Combustion engine according to claim 15, characterized in that barb-like tongues (18) which rest against a flange (34) on the engine block (30) are formed at the edge (12) of the oil sump (10).
- 18. Combustion engine according to claim 15, characterized in that there are formed on the oil sump (10) and on the engine block (30) sealing surfaces (14, 36) which

4

are shaped such that the sealing gap formed between them increases in size inwards.

19. Flange connection with two flange elements between which a seal is made with a curable composition, characterized in that threaded bolts are not used as connecting elements.

MODIFIED PAGE

1/2

Fig. 1


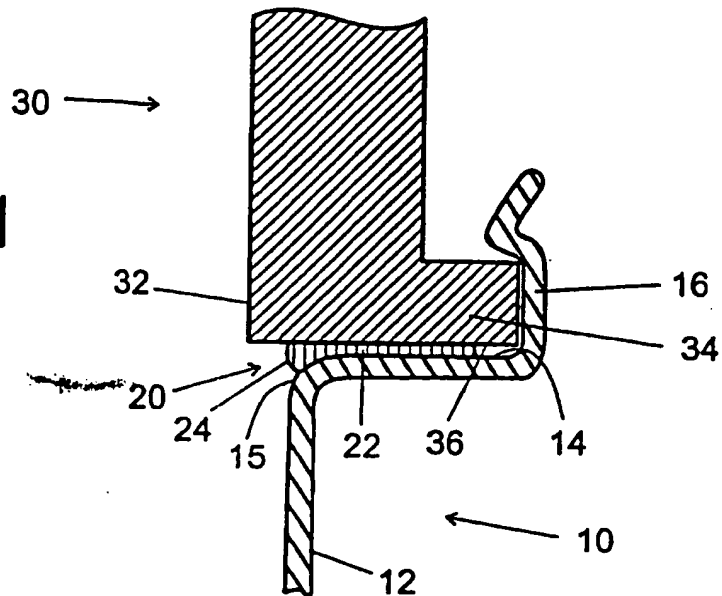


Fig. 2

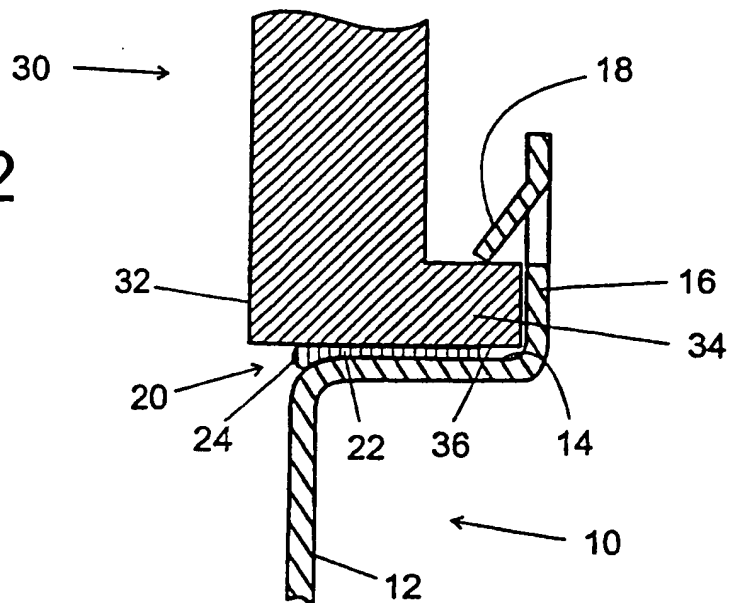

2/2

Fig. 3

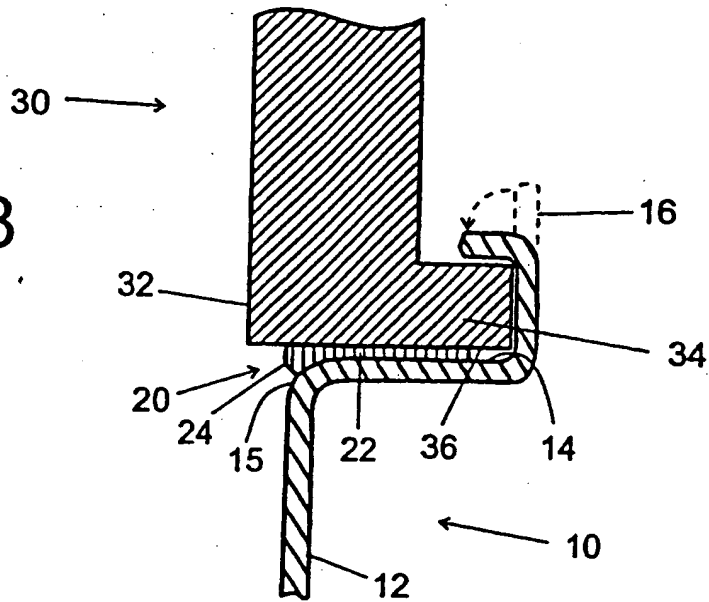


Fig. 4

